



SILVER-LINE COMPRESSORS

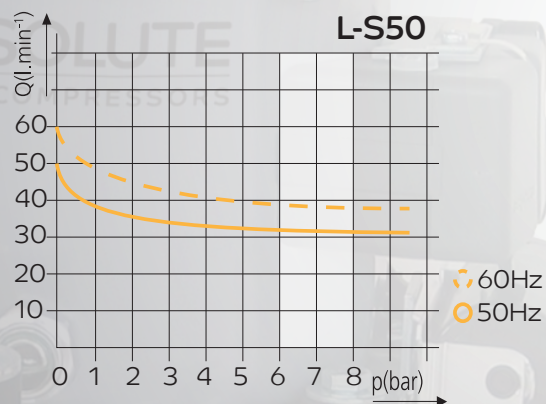

ABSOLUTE
QUIET COMPRESSORS

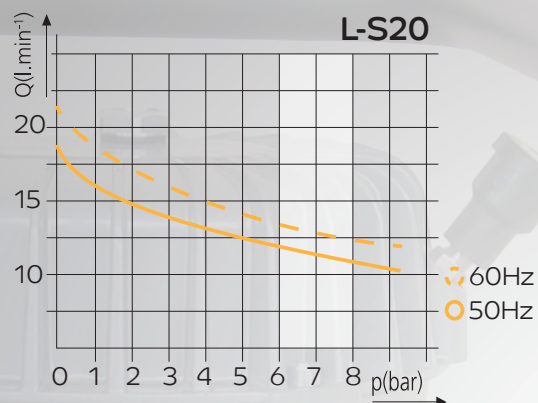




Quiet/oil-lubricated Compressors

Technical specification	L-S20 Motor	L-S20-4	L-S50 Motor	L-S50-4	L-S50-15	L-S50-25	
Voltage (*)	230	230	230	230	230	230	V
Frequency (*)	50	50	50	50	50	50	Hz
Motor	0.18 0.13	0.18 0.13	0.46 0.34	0.46 0.34	0.46 0.34	0.46 0.34	HP kW
Displacement	17 0.6	17 0.6	50 1.77	50 1.77	50 1.77	50 1.77	l/min. CFM
FAD@ 8 bar	11.5 0.41	11.5 0.41	32 1.13	32 1.13	32 1.13	32 1.13	l/min. CFM
Max. pressure (*)	8 120	8 120	8 120	8 120	8 120	8 120	bar psi
Max. current	1	1	2.9	2.9	2.9	2.9	A
Tank size	-	3.5	-	3.5	15	24	litres
Weight	9.3 20.5	16 35.3	13.7 30.2	21 46.3	27 59.5	28 61.7	kg lbs
Noise level	38	38	45	45	45	45	dB(A)/1m
Thermal protection	✓	✓	✓	✓	✓	✓	
Duty cycle	S3 ~ 50%	S3 ~ 50%	S3 ~ 50%	S3 ~ 50%	S3 ~ 50%	S3 ~ 50%	
Dimensions (l x w x h)	240 x 175 x 195 9.45 x 6.9 x 7.7	340 x 290 x 340 13.4 x 11.4 x 13.4	280 x 175 x 195 11 x 6.9 x 7.7	340 x 300 x 340 13.4 x 11.8 x 13.4	400 x 400 x 490 15.7 x 15.7 x 19.3	400 x 400 x 510 15.7 x 15.7 x 20.1	mm inch

Equipped with filter regulator as standard.

Technical changes reserved.

*Higher pressure and different voltage/frequency upon request.

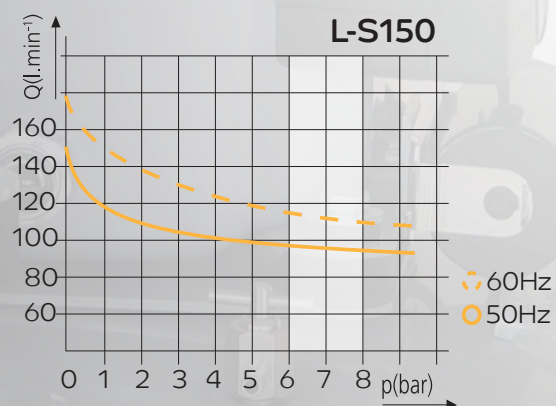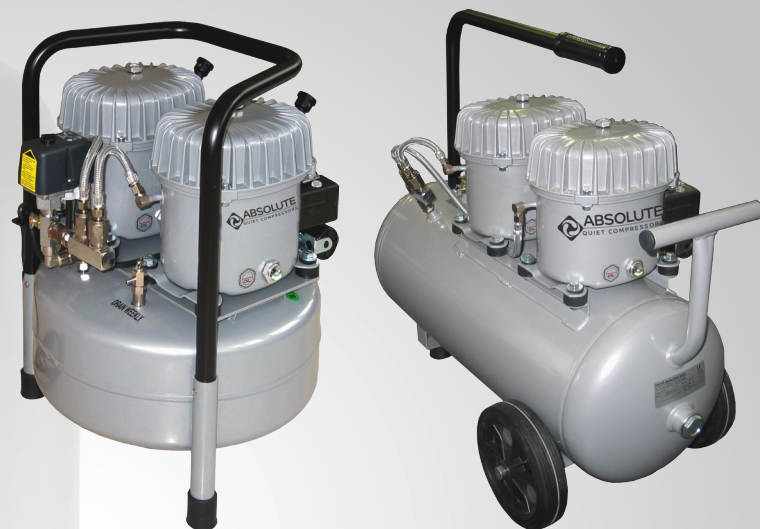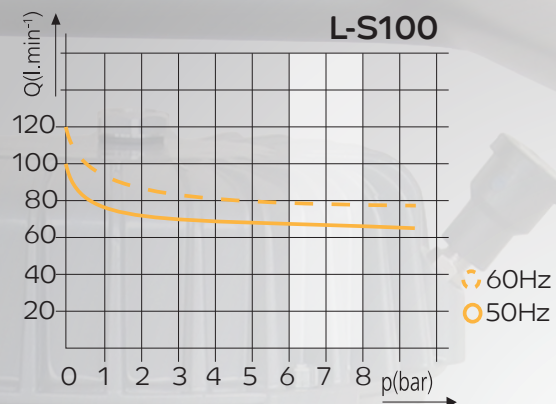



Quiet/oil-lubricated Compressors

Technical specification	L-S100-25	L-S100-50	L-S150-50	V
Voltage (*)	230	230	230	Hz
Frequency (*)	50	50	50	HP kW
Motor	0.92 0.68	0.92 0.68	1.38 1.01	l/min. CFM
Displacement	100 3.53	100 3.53	150 5.36	
FAD@ 8 bar	64 2.26	64 2.26	96 3.39	l/min. CFM
Max. pressure (*)	8 120	8 120	8 120	bar psi
Max. current	5.8	5.8	8.7	A
Tank size	24	50	50	litres
Weight	42 92.6	56 123.5	75 165.3	kg lbs
Noise level	48	48	50	dB(A)/1m
Thermal protection	✓	✓	✓	
Duty cycle	S3 ~ 50%	S3 ~ 50%	S3 ~ 50%	
Dimensions (l x w x h)	400 x 450 x 510 15.7 x 17.7 x 20.1	860 x 420 x 750 34 x 16.5 x 29.5	860 x 420 x 750 34 x 16.5 x 29.5	mm inch

Equipped with filter regulator as standard.

Technical changes reserved.

*Higher pressure and different voltage/frequency upon request.

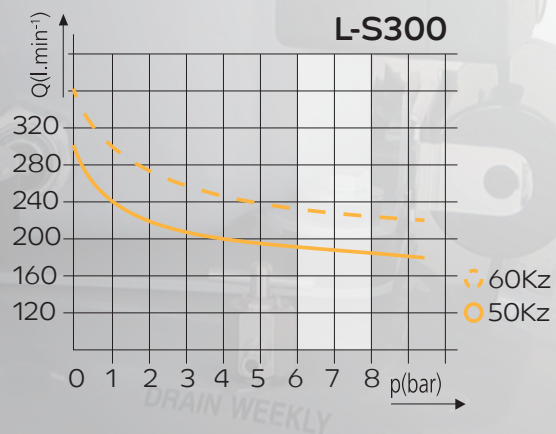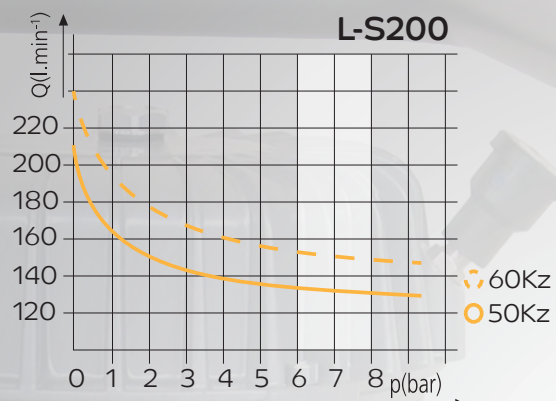

Quiet/oil-lubricated Compressors

Technical specification	L-S200-50	L-S300-100	
Voltage (*)	230	230	V
Frequency (*)	50	50	Hz
Motor	1.84 1.35	2.76 2.03	HP kW
Displacement	200 7.14	300 10.71	l/min. CFM
FAD@ 8 bar	128 4.57	192 6.86	l/min. CFM
Max. pressure (*)	8 120	8 120	bar psi
Max. current	11.6	17.4	A
Tank size	50	100	litres
Weight	88 194	135 297.6	kg lbs
Noise level	52	54	dB(A)/1m
Thermal protection	✓	✓	
Duty cycle	S3 ~ 50%	S3 ~ 50%	
Dimensions (l x w x h)	840 x 410 x 730 33.1 x 16.1 x 28.7	1160 x 390 x 710 45.7 x 15.4 x 27.9	mm inch

Equipped with filter regulator as standard.

Technical changes reserved.

* Higher pressure and different voltage/frequency upon request.

SILVER-LINE



The oil-lubricated SILVER-LINE compressors are the first choice when a quiet air supply is required.


The noise level of 45 db(A) is quieter than a normal conversation.


The SILVER-LINE compressors are available with optional accessories.



The oil-free SILVER-LINE compressors offer a clean air supply for high quality applications. The technology of OF-S60 and OF-S90 series ensures a 100% continuous operation and minimum maintenance efforts.

The SILVER-LINE compressors are available with optional accessories.

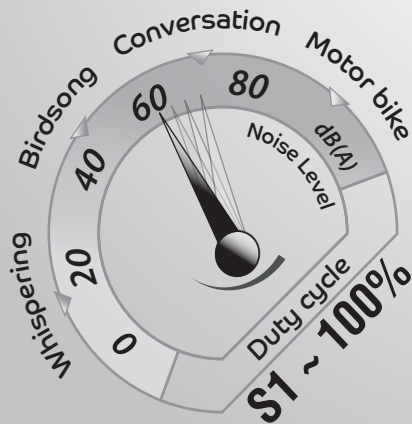

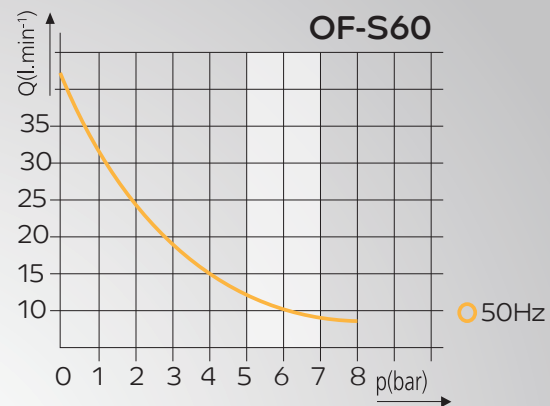


Oil-free Compressors

Technical specification	OF-S60 Motor	OF-S60-4	
Voltage (*)	230	230	V
Frequency (*)	50	50	Hz
Motor	0.3 0.22	0.3 0.22	HP kW
Displacement	56 2	56 2	l/min. CFM
FAD@ 5 bar	12.5 0.45	12.5 0.45	l/min. CFM
Max. pressure	7 101	7 101	bar psi
Max. current	1.15	1.15	A
Tank size	-	3.5	litres
Weight	6.9 15.2	13 28.7	kg lbs
Noise level	52	52	dB(A)/1m
Thermal protection	✓	✓	
Duty cycle	S1 ~ 100%	S1 ~ 100%	
Dimensions (l x w x h)	195 x 160 x 185 7.7 x 6.3 x 7.3	340 x 300 x 340 13.4 x 11.8 x 13.4	mm inch

Equipped with filter regulator as standard.

Technical changes reserved.

*Different voltage/frequency upon request.

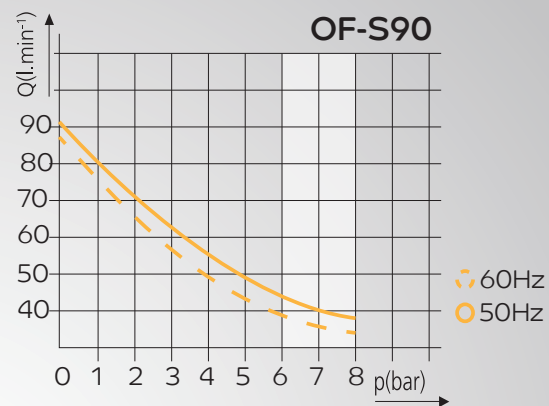

Oil-free Compressors

Technical specification	OF-S90 Motor	OF-S90-4	OF-S90-15	OF-S90-25	
Voltage (*)	230	230	230	230	V
Frequency (*)	50	50	50	50	Hz
Motor	0.61 0.45	0.61 0.45	0.61 0.45	0.61 0.45	HP kW
Displacement	91 3.25	91 3.25	91 3.25	91 3.25	l/min. CFM
FAD@ 5 bar	49 1.75	49 1.75	49 1.75	49 1.75	l/min. CFM
Max. pressure	8 120	8 120	8 120	8 120	bar psi
Max. current	2	2	2	2	A
Tank size	-	3.5	15	24	litres
Weight	8 17.6	15 33.1	19 41.9	21 46.3	kg lbs
Noise level	58	58	58	58	dB(A)/1m
Thermal protection	✓	✓	✓	✓	
Duty cycle	S1 ~ 100%	S1 ~ 100%	S1 ~ 100%	S1 ~ 100%	
Dimensions (l x w x h)	250 x 130 x 175 9.8 x 5.1 x 6.9	340 x 350 x 340 13.4 x 13.8 x 13.4	400 x 400 x 490 15.7 x 15.7 x 19.3	410 x 410 x 500 16.1 x 16.1 x 19.7	mm inch


Equipped with filter regulator as standard.

Technical changes reserved.

*Different voltage/frequency upon request.

ACCESSORIES

Overview of filter sizes according to different impurities in the air (in micron)

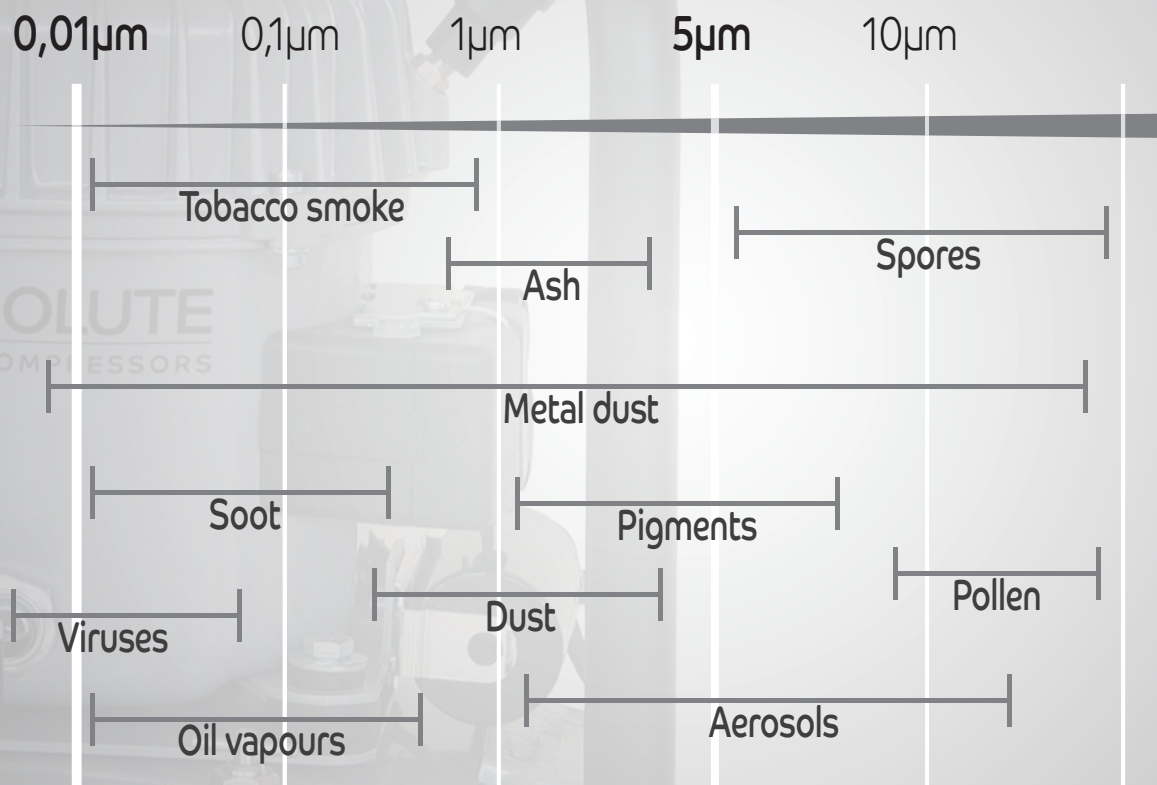

ACCESSORIES

The SILVER-LINE compressors can be equipped with the following accessories. The various filter grades as well as the automatic drain generate a better air quality.

Article
0,5 ltr. Synthetic oil for compressors
Pressure regulator with gauge
5 micron filter
5 micron filter with auto. drain
0,01 micron fine mesh filter
0,01 micron filter with auto. drain
Activated carbon filter
Filter regulator with 5 micron filter and gauge
Filter regulator with 5 micron filter, auto. drain and gauge
Automatic drain of air tank

Technical changes reserved.
For retrofitting accessories please indicate the corresponding compressor model.



L-S20-4
L-S50-4
L-S50-15
L-S50-25
L-S100-25
L-S100-50
L-S150-50
L-S200-50
L-S300-100

OF-S60-4
OF-S90-4
OF-S90-15
OF-S90-25



ABSOLUTE
AIR & GAS LIMITED

C6 Bromsgrove Technology Park,
Isidore Road, Bromsgrove B60 3FJ.
Tel: 01527 557006 Fax: 01527 559262
Email: sales@absoluteairandgas.co.uk
Web: www.absoluteairandgas.co.uk